




KEY FEATURES

- ✔ LARGE SELECTION OF STANDARD AND CUSTOM SIZES AVAILABLE.
- ✔ DESIGNED/MANUFACTURED AT 12 OR 15 WATTS PER SQUARE FOOT.
- ✔ DUAL MEMBRANE (FABRIC) MAT "SANDWICH" CONSTRUCTION.
- ✔ ULTRA-LOW PROFILE (APPROX. 1/8").
- ✔ CONSISTENT WIRE SPACING PROVIDES EVEN FLOOR HEATING.
- ✔ NO CUTTING AND FITTING REQUIRED, REDUCING THE CHANCES OF INSTALLATION ERRORS.
- ✔ 25 YEAR MAT WARRANTY.

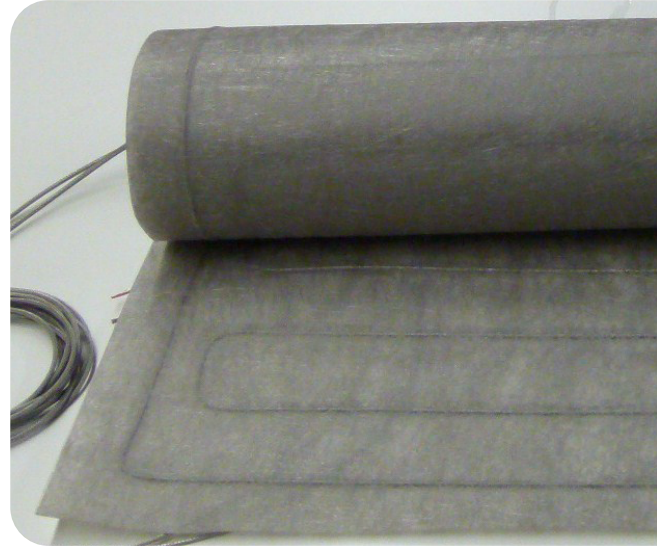

DESCRIPTION

When you are looking to provide a safe, energy efficient floor heating solution to your customers – make sure you choose **TRM Floor Heating Mats** for a system you can rely on. Our innovative, maintenance free heating technology and 25 year product warranty will provide a truly luxurious feeling of comfort for years to come. Whether for your latest home renovation project or for new construction, TRM electric floor heating mat systems are suitable for a wide range of interior heating applications in dry areas; as well as in wet areas, when an approved waterproofing membrane is installed above.

TRM offers over 100 standard mat sizes, as well as custom mats that can be made to fit the shape of your room, so you are sure to find the size you need. If one mat will not cover the desired area, multiple mats can be installed in the same room to warm the entire floor surface. TRM mats are approx. 1/8" thick and are available in 120, 208 and 240 volt ratings.

Combine with our uncoupling membrane system, to realize the benefits of an underlayment membrane with the comfort and convenience of electric floor heating. The membrane can be installed above the properly embedded heating mat as an uncoupling, crack isolating and waterproofing system.

TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|---|
| Voltage | 120V, 208V, 240V |
| Watts per sq foot | 12Watts / Sqft. standard (15 Watts/ sqft available using custom mats) |
| Construction | Fluoropolymer insulated heating wire with stainless steel braided covering, bonded between two layers of non-woven polymer fabric membrane. |
| Mat Profile | Heating wire and fabric are less than 1/8" thick. Refer to product installation manual for recommended sub-floor depression depth based on desired flooring type. |
| Cold Lead | 14AWG stranded copper conductor, stainless braid, 10 ft. standard. (Custom mat cold leads can be manufactured up to 25' long) |
| Approved Flooring Types | Tile, Stone, Laminate and Engineered Wood Floors. |
| Coverage | Single mats up to 6ft x 15ft. For larger areas mats can be wired in parallel to the same control (or using a relay) to heat as one large zone. |
| Warranty | 25 years |





120V – STANDARD MAT SIZES

| DIMENSIONS (INCHES) | WATTS | AMPS | OHMS | MODEL |
|---------------------|-------|------|-------|-------------|
| 24 x 48 | 96 | 0.8 | 149.4 | TRM-24048-1 |
| 24 x 60 | 118 | 1.0 | 122.1 | TRM-24060-1 |
| 24 x 72 | 144 | 1.2 | 99.8 | TRM-24072-1 |
| 24 x 84 | 167 | 1.4 | 86.5 | TRM-24084-1 |
| 24 x 96 | 194 | 1.6 | 74.4 | TRM-24096-1 |
| 24 x 108 | 211 | 1.8 | 68.1 | TRM-24108-1 |
| 24 x 120 | 244 | 2.0 | 59.1 | TRM-24120-1 |
| 24 x 132 | 269 | 2.2 | 53.6 | TRM-24132-1 |
| 24 x 144 | 289 | 2.4 | 49.9 | TRM-24144-1 |
| 24 x 156 | 318 | 2.7 | 45.2 | TRM-24156-1 |
| 24 x 168 | 341 | 2.8 | 42.3 | TRM-24168-1 |
| 24 x 180 | 369 | 3.1 | 39.1 | TRM-24180-1 |
| 30 x 48 | 119 | 1.0 | 120.7 | TRM-30048-1 |
| 30 x 60 | 148 | 1.2 | 97.6 | TRM-30060-1 |
| 30 x 72 | 178 | 1.5 | 80.9 | TRM-30072-1 |
| 30 x 84 | 208 | 1.7 | 69.2 | TRM-30084-1 |
| 30 x 96 | 242 | 2.0 | 59.4 | TRM-30096-1 |
| 30 x 108 | 276 | 2.3 | 52.1 | TRM-30108-1 |
| 30 x 120 | 303 | 2.5 | 47.5 | TRM-30120-1 |
| 30 x 132 | 327 | 2.7 | 44.1 | TRM-30132-1 |
| 30 x 144 | 361 | 3.0 | 39.9 | TRM-30144-1 |
| 30 x 156 | 387 | 3.2 | 37.2 | TRM-30156-1 |
| 30 x 168 | 414 | 3.4 | 34.8 | TRM-30168-1 |
| 30 x 180 | 458 | 3.8 | 31.4 | TRM-30180-1 |
| 36 x 48 | 141 | 1.2 | 102.5 | TRM-36048-1 |
| 36 x 60 | 180 | 1.5 | 79.9 | TRM-36060-1 |
| 36 x 72 | 216 | 1.8 | 66.8 | TRM-36072-1 |
| 36 x 84 | 250 | 2.1 | 57.6 | TRM-36084-1 |
| 36 x 96 | 283 | 2.4 | 50.9 | TRM-36096-1 |
| 36 x 108 | 323 | 2.7 | 44.6 | TRM-36108-1 |
| 36 x 120 | 368 | 3.1 | 39.1 | TRM-36120-1 |
| 36 x 132 | 403 | 3.4 | 35.7 | TRM-36132-1 |
| 36 x 144 | 436 | 3.6 | 33.0 | TRM-36144-1 |
| 36 x 156 | 469 | 3.9 | 30.7 | TRM-36156-1 |
| 36 x 168 | 502 | 4.2 | 28.7 | TRM-36168-1 |
| 36 x 180 | 548 | 4.6 | 26.3 | TRM-36180-1 |
| 42 x 48 | 166 | 1.4 | 86.7 | TRM-42048-1 |
| 42 x 60 | 205 | 1.7 | 70.1 | TRM-42060-1 |
| 42 x 72 | 252 | 2.1 | 57.1 | TRM-42072-1 |
| 42 x 84 | 299 | 2.5 | 48.1 | TRM-42084-1 |
| 42 x 96 | 332 | 2.8 | 43.4 | TRM-42096-1 |
| 42 x 108 | 385 | 3.2 | 37.4 | TRM-42108-1 |
| 42 x 120 | 420 | 3.5 | 34.3 | TRM-42120-1 |
| 42 x 132 | 468 | 3.9 | 30.7 | TRM-42132-1 |
| 42 x 144 | 505 | 4.2 | 28.5 | TRM-42144-1 |
| 42 x 156 | 551 | 4.6 | 26.1 | TRM-42156-1 |
| 42 x 168 | 592 | 4.9 | 24.3 | TRM-42168-1 |
| 42 x 180 | 631 | 5.3 | 22.8 | TRM-42180-1 |
| 48 x 48 | 189 | 1.6 | 76.3 | TRM-48048-1 |
| 48 x 60 | 237 | 2.0 | 60.7 | TRM-48060-1 |
| 48 x 72 | 295 | 2.5 | 48.8 | TRM-48072-1 |
| 48 x 84 | 330 | 2.8 | 43.6 | TRM-48084-1 |
| 48 x 96 | 390 | 3.3 | 36.9 | TRM-48096-1 |
| 48 x 108 | 434 | 3.6 | 33.2 | TRM-48108-1 |
| 48 x 120 | 490 | 4.1 | 29.4 | TRM-48120-1 |
| 48 x 132 | 532 | 4.4 | 27.1 | TRM-48132-1 |
| 48 x 144 | 577 | 4.8 | 25.0 | TRM-48144-1 |
| 48 x 156 | 619 | 5.2 | 23.3 | TRM-48156-1 |
| 48 x 168 | 661 | 5.5 | 21.8 | TRM-48168-1 |
| 48 x 180 | 705 | 5.9 | 20.4 | TRM-48180-1 |
| 60 x 60 | 296 | 2.5 | 48.6 | TRM-60060-1 |
| 60 x 72 | 355 | 3.0 | 40.6 | TRM-60072-1 |
| 60 x 84 | 424 | 3.5 | 34.0 | TRM-60084-1 |
| 60 x 96 | 476 | 4.0 | 30.3 | TRM-60096-1 |
| 60 x 108 | 544 | 4.5 | 26.5 | TRM-60108-1 |
| 60 x 120 | 614 | 5.1 | 23.4 | TRM-60120-1 |
| 60 x 132 | 657 | 5.5 | 21.9 | TRM-60132-1 |
| 60 x 144 | 709 | 5.9 | 20.3 | TRM-60144-1 |
| 60 x 156 | 796 | 6.6 | 18.1 | TRM-60156-1 |
| 60 x 168 | 860 | 7.2 | 16.7 | TRM-60168-1 |
| 60 x 180 | 917 | 7.6 | 15.7 | TRM-60180-1 |

240V – STANDARD MAT SIZES


| DIMENSIONS (INCHES) | WATTS | AMPS | OHMS | MODEL |
|---------------------|-------|------|-------|-------------|
| 24 x 96 | 206 | 0.9 | 280.1 | TRM-24096-2 |
| 24 x 108 | 232 | 1.0 | 248.6 | TRM-24108-2 |
| 24 x 120 | 235 | 1.0 | 244.9 | TRM-24120-2 |
| 24 x 144 | 294 | 1.2 | 196.0 | TRM-24144-2 |
| 24 x 156 | 315 | 1.3 | 182.7 | TRM-24156-2 |
| 24 x 168 | 340 | 1.4 | 169.3 | TRM-24168-2 |
| 24 x 180 | 361 | 1.5 | 159.8 | TRM-24180-2 |
| 30 x 72 | 182 | 0.8 | 316.2 | TRM-30072-2 |
| 30 x 84 | 215 | 0.9 | 267.4 | TRM-30084-2 |
| 30 x 96 | 238 | 1.0 | 242.0 | TRM-30096-2 |
| 30 x 120 | 303 | 1.3 | 190.4 | TRM-30120-2 |
| 30 x 132 | 334 | 1.4 | 172.4 | TRM-30132-2 |
| 30 x 144 | 359 | 1.5 | 160.6 | TRM-30144-2 |
| 30 x 156 | 389 | 1.6 | 148.0 | TRM-30156-2 |
| 30 x 168 | 427 | 1.8 | 134.8 | TRM-30168-2 |
| 30 x 180 | 456 | 1.9 | 126.3 | TRM-30180-2 |
| 36 x 60 | 178 | 0.7 | 323.3 | TRM-36060-2 |
| 36 x 72 | 216 | 0.9 | 267.1 | TRM-36072-2 |
| 36 x 96 | 289 | 1.2 | 199.0 | TRM-36096-2 |
| 36 x 108 | 326 | 1.4 | 176.5 | TRM-36108-2 |
| 36 x 120 | 367 | 1.5 | 156.8 | TRM-36120-2 |
| 36 x 132 | 399 | 1.7 | 144.2 | TRM-36132-2 |
| 36 x 144 | 431 | 1.8 | 133.7 | TRM-36144-2 |
| 36 x 156 | 472 | 2.0 | 122.0 | TRM-36156-2 |
| 36 x 168 | 511 | 2.1 | 112.8 | TRM-36168-2 |
| 36 x 180 | 543 | 2.3 | 106.1 | TRM-36180-2 |
| 42 x 60 | 219 | 0.9 | 263.1 | TRM-42060-2 |
| 42 x 84 | 298 | 1.2 | 193.5 | TRM-42084-2 |
| 42 x 96 | 332 | 1.4 | 173.6 | TRM-42096-2 |
| 42 x 108 | 381 | 1.6 | 151.1 | TRM-42108-2 |
| 42 x 120 | 427 | 1.8 | 134.8 | TRM-42120-2 |
| 42 x 132 | 471 | 2.0 | 122.4 | TRM-42132-2 |
| 42 x 144 | 504 | 2.1 | 114.2 | TRM-42144-2 |
| 42 x 156 | 559 | 2.3 | 103.1 | TRM-42156-2 |
| 42 x 168 | 580 | 2.4 | 99.2 | TRM-42168-2 |
| 42 x 180 | 640 | 2.7 | 90.0 | TRM-42180-2 |
| 48 x 60 | 242 | 1.0 | 237.7 | TRM-48060-2 |
| 48 x 72 | 285 | 1.2 | 201.8 | TRM-48072-2 |
| 48 x 84 | 339 | 1.4 | 170.0 | TRM-48084-2 |
| 48 x 96 | 377 | 1.6 | 152.8 | TRM-48096-2 |
| 48 x 108 | 435 | 1.8 | 132.4 | TRM-48108-2 |
| 48 x 120 | 488 | 2.0 | 118.0 | TRM-48120-2 |
| 48 x 132 | 531 | 2.2 | 108.4 | TRM-48132-2 |
| 48 x 144 | 583 | 2.4 | 98.9 | TRM-48144-2 |
| 48 x 156 | 636 | 2.7 | 90.5 | TRM-48156-2 |
| 48 x 168 | 680 | 2.8 | 84.7 | TRM-48168-2 |
| 48 x 180 | 732 | 3.0 | 78.7 | TRM-48180-2 |
| 60 x 60 | 294 | 1.2 | 196.2 | TRM-60060-2 |
| 60 x 72 | 351 | 1.5 | 163.9 | TRM-60072-2 |
| 60 x 84 | 418 | 1.7 | 137.9 | TRM-60084-2 |
| 60 x 96 | 485 | 2.0 | 118.8 | TRM-60096-2 |
| 60 x 108 | 541 | 2.3 | 106.4 | TRM-60108-2 |
| 60 x 120 | 614 | 2.6 | 93.8 | TRM-60120-2 |
| 60 x 132 | 656 | 2.7 | 87.9 | TRM-60132-2 |
| 60 x 144 | 729 | 3.0 | 79.0 | TRM-60144-2 |
| 60 x 156 | 792 | 3.3 | 72.8 | TRM-60156-2 |
| 60 x 168 | 848 | 3.5 | 68.0 | TRM-60168-2 |
| 60 x 180 | 921 | 3.8 | 62.5 | TRM-60180-2 |

**TRM
STANDARD
MATS**


Standard mats are square or rectangular in shape, and are the economical choice for floor warming. With over 100 models to choose from, you are sure to find the size you need. If one mat will not cover the desired area, multiple mats can be installed in the same room to warm the entire floor surface.

TRM CUSTOM MATS

Custom mats are manufactured to fit your room dimensions, simplifying the installation process. They provide the best coverage and maximize comfort. Custom mats are designed specifically to suit rooms with curved or angled walls. If one mat will not cover the desired area, multiple mats can be installed in the same room to warm the entire floor surface.

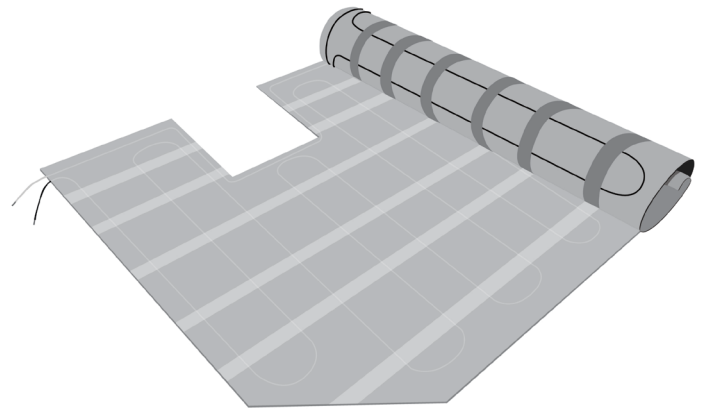


Trowel thinset mortar



Roll in mat



Press into place



Install thermostat sensor




Finish flooring

TRM FLOOR HEATING THERMOSTATS



TRM-FH-GOLD

- Bluetooth®, Wifi, Cloud connected
- 3.5" colour touchscreen with interactive control
- Full programmability
- Tracks power consumption
- Dual voltage compatibility (120V or 240V)
- 15 Amp capacity
- 15' Floor sensor (included)
- Complete with GFCI protection



TRM-FH-SILVER

- 3.5" colour touchscreen with interactive control
- Full programmability
- Tracks power consumption
- Dual voltage compatibility (120V or 240V)
- 15 Amp capacity
- 15' Floor sensor (included)
- Complete with GFCI protection



TRM-FH-BRONZE

- Non-programmable
- Tracks power consumption
- Dual voltage compatibility (120V or 240V)
- 15 Amp capacity
- 15' Floor sensor (included)
- Complete with GFCI protection



Optional - TRM-FH-Relay (USG-4000)

The TRM-FH-Relay power expansion module can be used in concert with any TRH-FH thermostat in projects with large heated floor areas that exceed a single thermostat's 15 amp capacity. Low voltage master/slave wiring between the thermostat and relay(s) is required.



WARRANTY

We believe in the superior quality of all of our TRM floor heating products. That's why we offer a **25-year warranty** to cover all potential TRM floor-heating product defects, and a 3-year warranty on all TRM thermostats and relays; when installed by a certified professional.

TRM is a Canadian-owned leading designer, and manufacturer of premium heating cable and systems in the commercial, industrial, and residential sectors.

GET IN TOUCH 905 940 4737 info@trmheatingcables.com www.trmheatingcables.com

